

United States Patent and Trademark Office

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.usplo.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/773,860	02/06/2004	Rajesh Banginwar	30320/18023	7222
4743	7590 06/21/2006		EXAM	INER
	LL, GERSTEIN & BOR		LAU, T	UNG S
233 S. WAC SEARS TO	KER DRIVE, SUITE 630 VFR	0	ART UNIT	PAPER NUMBER
CHICAGO,	. —		2863	
			DATE MAILED: 06/21/200	6

Please find below and/or attached an Office communication concerning this application or proceeding.

		HA
	Application No.	Applicant(s)
Office Action Summers	10/773,860	BANGINWAR ET AL.
Office Action Summary	Examiner	Art Unit
	Tung S. Lau	2863
The MAILING DATE of this communication Period for Reply	n appears on the cover sheet w	vith the correspondence address
A SHORTENED STATUTORY PERIOD FOR REWHICHEVER IS LONGER, FROM THE MAILING. - Extensions of time may be available under the provisions of 37 CF after SIX (6) MONTHS from the mailing date of this communication. If NO period for reply is specified above, the maximum statutory provided to reply within the set or extended period for reply will, by some any reply received by the Office later than three months after the rearned patent term adjustment. See 37 CFR 1.704(b).	G DATE OF THIS COMMUN RR 1.136(a). In no event, however, may a n. eriod will apply and will expire SIX (6) MO statute, cause the application to become A	ICATION. reply be timely filed NTHS from the mailing date of this communication. BANDONED (35 U.S.C. § 133).
Status		
1) Responsive to communication(s) filed on 2	22 May 2006.	
	This action is non-final.	
3) Since this application is in condition for all	owance except for formal mat	tters, prosecution as to the merits is
closed in accordance with the practice und	ler <i>Ex parte Quayle</i> , 1935 C.I	D. 11, 453 O.G. 213.
Disposition of Claims		
4)⊠ Claim(s) <u>1-26</u> is/are pending in the applica	ition.	
4a) Of the above claim(s) is/are with		
5) Claim(s) is/are allowed.		
6)⊠ Claim(s) <u>1-26</u> is/are rejected.		
7) Claim(s) is/are objected to.		
8) Claim(s) are subject to restriction a	nd/or election requirement.	
Application Papers		
9) The specification is objected to by the Exar	miner.	
10)⊠ The drawing(s) filed on <u>02/06/2004</u> is/are:		ed to by the Examiner.
Applicant may not request that any objection to		
Replacement drawing sheet(s) including the co	rrection is required if the drawing	g(s) is objected to. See 37 CFR 1.121(d).
11)☐ The oath or declaration is objected to by th	e Examiner. Note the attache	d Office Action or form PTO-152.
Priority under 35 U.S.C. § 119		
12) Acknowledgment is made of a claim for for a) All b) Some * c) None of:	eign priority under 35 U.S.C.	§ 119(a)-(d) or (f).
1. Certified copies of the priority docun	nents have been received.	
2. Certified copies of the priority docun	nents have been received in A	Application No
3. Copies of the certified copies of the	priority documents have beer	n received in this National Stage
application from the International Bu	, ,,,	
* See the attached detailed Office action for a	list of the certified copies no	t received.
Attachment(s)		-
1) Notice of References Cited (PTO-892)	4) 🔲 Interview	Summary (PTO-413)

U.S. Patent and Trademark Office PTOL-326 (Rev. 7-05)

2) Notice of Draftsperson's Patent Drawing Review (PTO-948)

Paper No(s)/Mail Date See office action.

3) Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)

Paper No(s)/Mail Date. _____.

6) Other: ____

5) Notice of Informal Patent Application (PTO-152)

DETAILED ACTION

Continued Examination Under 37 CFR 1.114

1. A request for continued examination under 37 CFR 1.114, including the fee set forth in 37 CFR 1.17(e), was filed in this application after final rejection. Since this application is eligible for continued examination under 37 CFR 1.114, and the fee set forth in 37 CFR 1.17(e) has been timely paid, the finality of the previous Office action has been withdrawn pursuant to 37 CFR 1.114. Applicant's submission filed on 05/22/2006 has been entered.

Information Disclosure Statement

2. Information Disclosure Statement filed on 06/05/2006 is acknowledged by the examiner; A copy of a signed PTO-1449 attached with this office action.

Claim Rejections - 35 USC § 101

3. The following is a quotation of the appropriate paragraphs of 35 U.S.C. 101 that form the basis for the rejections under this section made in this Office action:

35 U.S.C. 101 reads as follows:

Whoever invents or discovers any new and useful process, machine, manufacture, or composition of matter, or any new and useful improvement thereof, may obtain a patent therefor, subject to the conditions and requirements of this title.

Claims 1-19 are rejected under 35 U.S.C. 101 because the claimed invention is directed to non-statutory subject matter.

In claims 1-9, a machine-accessible medium having stored instruction cause the machine to measure power usage and analyze performance. In claims 10-19, a method of profiling code executable on a machine including measuring power

usage and sampling data. These claims appear to merely describe data manipulation and lack of concrete and tangible result. The practical application of the claimed invention cannot be realized until the information determined is conveyed to the user. For the result to be tangible it would need to output to a user or stored for later use. Hence the claims are treated as nonstatutory functional descriptive material (See MPEP § 2106 and OG Notices: 22 November 2005, Guidelines for Examination of Patent Applications for Patent Subject Matter Eligibility).

In claims 1-9, a machine-accessible medium having stored instruction cause the machine to measure power usage and analyze performance, it describes mathematical transformation of data manipulation, merely claiming nonfunctional descriptive material, i.e., abstract ideas, stored in a computer-readable medium, in a computer, on an electromagnetic carrier signal does not make it statutory. See Diehr, 450 U.S. at 185-86, 209 USPQ at 8, When nonfunctional descriptive material, i.e., abstract ideas is recorded on some computer-readable medium, in a computer or on an electromagnetic carrier signal, it is not statutory and should be rejected under 35 U.S.C. § 101 (See OG Notices: 22 November 2005).

The claimed invention as a whole must accomplish a practical application. That is, it must produce a "useful, concrete and tangible result." State Street, 149 F.3d at 1373, 47 USPQ2d at 1601-02, ("the transformation of data, representing discrete dollar amounts, by a machine through a series of mathematical

calculations into a final share price, constitutes a practical application of a mathematical algorithm, formula, or calculation, because it produces 'a useful, concrete and tangible result' – a final share price momentarily fixed for recording and reporting purposes and even accepted and relied upon by regulatory authorities and in subsequent trades.").

The purpose of this requirement is to limit patent protection to inventions that possess a certain level of "real world" value, as opposed to subject matter that represents nothing more than an idea or concept, or is simply a starting point for future investigation or research (Brenner v. Manson, 383 U.S. 519, 528-36, 148 USPQ 689, 693-96); In re Ziegler, 992, F.2d 1197, 1200-03, 26 USPQ2d 1600, 1603-06 (Fed. Cir. 1993)).

A process that consists solely of the manipulation of an abstract idea is not concrete or tangible. See In re Warmerdam, 33 F.3d 1354, 1360, 31 USPQ2d 1754, 1759 (Fed. Cir. 1994). See also Schrader, 22 F.3d at 295, 30 USPQ2d at 1459. Nor can one patent "a novel and useful mathematical formula," Flook, 437 U.S. at 585, 198 USPQ at 195; electromagnetism or steam power, O'Reilly v. Morse, 56 U.S. (15 How.) 62, 113-114 (1853).

Claim Rejections - 35 USC § 102

- 4. The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:


 A person shall be entitled to a patent unless
 - (b) the invention was patented or described in a printed publication in this or a foreign country or in public use or on sale in this country, more than one year prior to the date of application for patent in the United States.

Art Unit: 2863

Claims 1-26 are rejected under 35 U.S.C. 102(b) as being anticipated by Jason Flinn and M. Satyanarayanan (Energy-aware adaptation for mobile applications, School of Computer Science, Carnegie Mellon University, 12/1999).

Regarding claim 1:

Jason Flinn and M. Satyanarayanan disclose an article comprising a machine-accessible medium having stored thereon instructions that, when executed by a machine, cause the machine to: measulre power usage on the machine; determine when a plurality of a quantum of power has been used on the machine; in response to usage of the quantum of power on the machine, sample state data of the machine where the state data indicates a state of code execution on the machine; and analyze performance of the code execution on the machine based on sampled state data.



This hardware setup is used during PowerScope data collection. A data collection computer distinct from the profiling computer controls the multimeter and stores samples from it. Later, program counter and process id samples are correlated offline with current levels to yield energy profiles.

Figure 1. Data collection in PowerScope

Art Unit: 2863

Process	CPU Time(s)	Total Energy(J)	Average Power(W)
/usr/odyssey/bin/xanim	66.57	643.17	9.66
/usr/X11R6/bin/X	35.72	331.58	9.28
Kernel	50.89	328.71	6.46
Interrupts-WaveLAN	18.62	165.88	8.91
/usr/odyssey/bin/odyssey	12.19	123.40	10.12
~~~~~~			
Total	183.99	1592.75	8.66

Energy Usage Detail for process /usr/odyssey/bin/odyssey

Procedure	CPU Time(s)	Total Energy(J)	Average Power(W)
_Dispatcher	0.25	2.53	10.11
_IOMGR_CheckDescriptors	0.17	1.74	10.23
_sftp_DataArrived	0.16	1.68	10.48
_rpc2_RecvPacket	0.16	1.67	10.41
_ExaminePacket	0.16	1.66	10.35

This figure shows a sample energy profile. The first table summarizes the energy usage by process, while the table below shows a portion of the detailed profile for a single process. Only part of the full profile is shown.

Figure 2. Example of an energy profile

# Regarding claim 10:

Jason Flinn and M. Satyanarayanan disclose a method of profiling code executable on a machine (fig. 1, Energy monitor, page 2, Lines 6-22), the method comprising: measuring power usage on the machine (fig. 2); determining when a plurality of a quantum of power has been used on the machine (fig. 2, fig. 3); and in response to usage of the quantum of power on the machine, sampling state data on the machine (fig. 3, page 3, Lines 7-22), where the state data indicates a state of code execution on the machine (page 3, Lines 7-22, fig. 6); and

Art Unit: 2863

analyzing performance of the code execution on the machine based on sampled state data (fig. 5, 6).

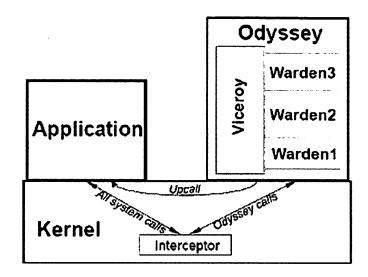


Figure 3. Odyssey architecture

### Regarding claim 20:

Jason Flinn and M. Satyanarayanan disclose an apparatus comprising: a power measurement module (fig. 1, energy monitor) capable of measuring power usage in the apparatus and capable of determining when a quantum of power has been used (fig. 4, page 2, Lines 6-22); and a power sampling module (fig. 1, energy monitor) coupled to the power measurement module for sampling state data of the apparatus after each of a plurality of quantum of power has been used (fig. 1, system monitor, fig. 6); and a power analysis module (fig. 3, Odyssey) that analyzes code execution on the apparatus in response to the sampling of the

Art Unit: 2863

state data to develop a power profile of the code (page 2, Lines 23-31, fig. 5, fig. 6).

Component	State	Power (W)
Display	Bright	4.54
	Dim	1.95
WaveLAN	Idle	1.46
	Standby	0.18
Disk	Idle	0.88
	Standby	0.24
Other	Idle	3.20

Background (display dim, WaveLAN & disk standby) = 5.6 W.

This figure shows the measured power consumption of components of the IBM 560X laptop. Power usage is slightly but consistently superlinear; for example, the laptop uses 10.28 W when the screen is brightest and the disk and network are idle — 0.21 W more than the sum of the individual power usage of each component. The last row shows the power used when the disk, screen, and network are all powered off. Each value is the mean of five trials — in all cases, the sample standard deviation is less than 0.01 W.


Figure 4. Power consumption of IBM ThinkPad 560X

Regarding claim 2, Jason Flinn and M. Satyanarayanan further disclose the article of having further instructions that, when executed by the machine (fig. 3, Kernel), cause the machine to provide the sampled state data to a performance analysis module (fig. 3, Odyssey, fig. 4, 6)), and compare the sampled state data to previously sampled state date for determining a power profile of the code based on the state data (fig. 4, 6).

Art Unit: 2863

**Regarding claim 3,** Jason Flinn and M. Satyanarayanan further disclose the article wherein the machine has a power measurement module (fig.1, Energy Monitor, fig. 4).

**Regarding claim 4,** Jason Flinn and M. Satyanarayanan further disclose the article wherein the machine comprises a plurality of subsystems (fig. 4) and wherein the power measurement module is coupled to at least one of the plurality of subsystems for measuring power usage of the at least one of the plurality of subsystems (fig. 4).

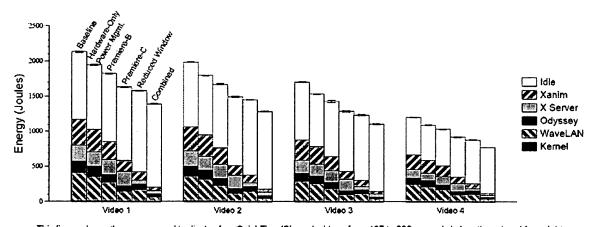

This figure shows the energy used to display four QuickTime/Cinepak videos from 127 to 226 seconds in length, ordered from right to left above. For each video, the first bar shows energy usage without hardware power management or fidelity reduction. The second bar shows the impact of hardware power management alone. The next two show the impact of lossy compression. The fifth shows the impact of reducing the size of the display window. The final bar shows the combined effect of lossy compression and window size reduction. The shadings within each bar detail energy usage by software component. Each value is the mean of five trials — the error bars show 90% confidence intervals.

Figure 6. Energy impact of fidelity for video playing

**Regarding claim 5,** Jason Flinn and M. Satyanarayanan further disclose the article of claim 4, having further instructions that when executed on the machine, cause the machine to: measure power usage of at least one of the plurality of subsystems (fig. 3, Odyssey, Page 2, Lines 23-31, Application, fig. 4)

Regarding claim 6, Jason Flinn and M. Satyanarayanan further disclose the article of claim 5, wherein the at least one of the plurality of subsystems includes a network subsystem (fig. 4, specially LAN network), a graphics display subsystem (fig. 4, 6, specially display video), or a data storage subsystem (fig. 4, specially disk).

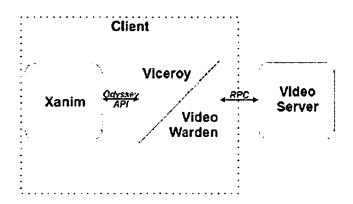


Figure 5. Odyssey video player

**Regarding claim 7,** Jason Flinn and M. Satyanarayanan further disclose the article wherein the at least one of the plurality of subsystems includes an input/output device (fig. 7, 8, specially a speech recognition system) or an expansion slot subsystem.

**Regarding claim 8,** Jason Flinn and M. Satyanarayanan further disclose the article wherein the state data is a program counter (page 2, Lines 6-22) indicative of a state of execution of the code (fig. 6).

Regarding claim 9, Jason Flinn and M. Satyanarayanan further disclose the article wherein the state data comprises a program counter (page 2, Lines 6-22), status of the machine (fig. 4, 6), status of at least one subsystem of the

Art Unit: 2863

machine (fig. 4, 6), status of at least one component of the machine (fig. 4), or status of at least one functional unit embedded in a subsystem (fig. 4, 5, 6).

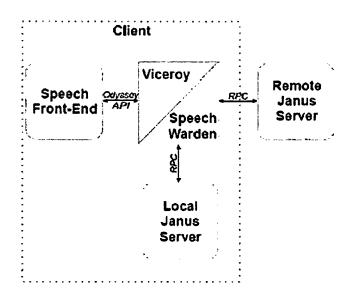



Figure 7. Odyssey speech recognizer

Regarding claim 24, Jason Flinn and M. Satyanarayanan further disclose the article of claim 1, having further instructions that when executed on the machine (fig. 3, Odyssey), cause the machine to profile power usage of the code executing (page 2, Lines 21-31), on the machine (fig. 4, 6, 8, 11, 16).

Regarding claim 25, Jason Flinn and M. Satyanarayanan further disclose the article wherein the machine comprises a plurality of subsystems (fig. 2, 4), the article having further instructions that when executed on the machine (page 2, Lines 6-23), cause the machine to profile power usage of the code executing within one of the plurality of subsystems (page 2, lines 21-31, fig. 3, Odyssey).

Art Unit: 2863

Regarding claim 26, Jason Flinn and M. Satyanarayanan further disclose the article wherein the state data comprises a stack pointer, current memory usage (page 9, lines 1-12), a number of instructions executed, or a number of accesses to a memory storage.

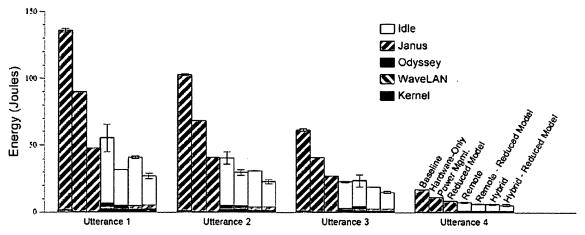

This figure shows the energy used to recognize four spoken utterances from one to seven seconds in length, ordered from right to left above. For each utterance, the first bar shows energy consumption without hardware power management or fidelity reduction. The second bar shows the impact of hardware power management alone. The remaining bars show the additional savings realized by adaptive strategies. The shadings within each bar detail energy usage by activity. Each measurement is the mean of five trials — the error bars show 90% confidence intervals.

Figure 8. Energy impact of fidelity for speech recognition

Regarding claim 11, Jason Flinn and M. Satyanarayanan further disclose the method wherein the machine comprises a plurality of subsystems, and wherein measuring power usage comprises measuring power delivered to at least one of the plurality of subsystems (fig. 4).

Regarding claim 12, Jason Flinn and M. Satyanarayanan further disclose the method wherein the machine comprises a plurality of subsystems, measuring power usage comprising measuring power consumed by at least one of the plurality of subsystems (fig. 4).

Regarding claim 13, Jason Flinn and M. Satyanarayanan further disclose the method wherein the machine comprises a plurality of subsystems and a power measurement module capable of measuring current or power delivered to at least one of the plurality of subsystems (fig. 4, 6, 8, page 2, Lines 6-22).

Regarding claim 14, Jason Flinn and M. Satyanarayanan further disclose the method wherein the at least one of the plurality of subsystems includes a network subsystem (fig. 4, LAN), a graphics display subsystem (fig. 4, display), or a data storage subsystem (fig. 4, disk).

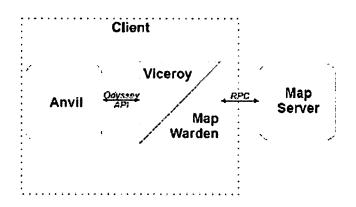



Figure 9. Odyssey map viewer

Regarding claim 15, Jason Flinn and M. Satyanarayanan further disclose the method wherein the at least one of the plurality of subsystems includes an input device (fig. 4, LAN, disk, display) or an expansion slot device.

**Regarding claim 16,** Jason Flinn and M. Satyanarayanan further disclose the method further comprising: providing power to the machine (page 2,Lines 6-22).

**Regarding claim 17,** Jason Flinn and M. Satyanarayanan further disclose the method further comprising: providing the sampled state data to a performance analyzer (fig. 6, 8, 10, 13).

**Regarding claim 18,** Jason Flinn and M. Satyanarayanan further disclose the method wherein the state data is a program counter (page 2,Lines 6-22).

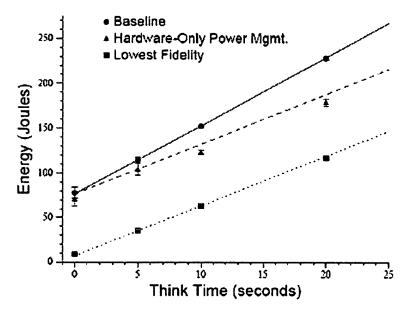

This figure shows how the energy used to view the San Jose map from Figure 10 varies with think time. The data points show measured energy usage. The solid, dashed and dotted lines represent linear models for energy usage for the baseline, hardware-only power management and lowest fidelity cases. The latter combines filtering and cropping, as in the rightmost bars of Figure 10. Each measurement is the mean of ten trials — the error bars are 90% confidence intervals.

Figure 11. Effect of user think time for map viewing

Regarding claim 19, Jason Flinn and M. Satyanarayanan further disclose the method wherein the state data comprises a program counter (page 2,Lines 6-22), status of the machine (fig. 4), status of at least one subsystem of the machine


Art Unit: 2863

(fig. 4), status of at least one component of the machine (fig. 4), or status of at least one functional unit embedded in a subsystem (fig. 4, 2).

**Regarding claim 21,** Jason Flinn and M. Satyanarayanan further disclose the apparatus further comprising a power source (page 2, Lines 6-22).

**Regarding claim 22,** Jason Flinn and M. Satyanarayanan further disclose the apparatus wherein the power analysis module compares the sampled state data to stored state data (fig. 6, 8, 10, 11).

Regarding claim 23, Jason Flinn and M. Satyanarayanan further disclose the apparatus wherein the state data comprises a program counter (page 2, Lines 6-22), status of the machine (fig. 4), status of at least one subsystem of the machine (fig. 4), status of at least one component of the machine (fig. 4), or status of at least one functional unit embedded in a subsystem (fig. 2, 4, 16).

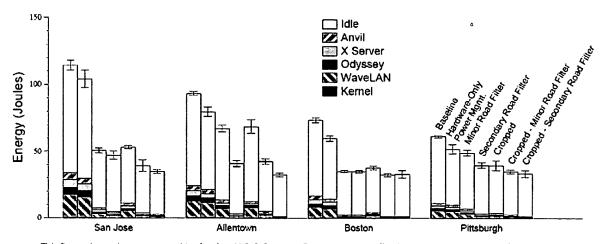

This figure shows the energy used to view four U.S.G.S. maps. For each map, the first bar shows energy usage without hardware power management or fidelity reduction, with a 5 second think time. The second bar shows the impact of hardware power management alone. The remaining bars show the additional savings realized by degrading map fidelity. The shadings within each bar detail energy usage by activity. Each measurement is the mean of ten trials—the error bars are 90% confidence intervals.

Figure 10. Energy impact of fidelity for map viewing

Application/Control Number: 10/773,860 Page 16

Art Unit: 2863

Application	Think	Baseline	Hardware	Fidelity	Combined
	Time (s.)		Power Mgmt.	Reduction	
Video	N/A	1.00	0.90-0.91	0.84-0.84	0.65-0.65
Speech	N/A	1.00	0.66-0.67	0.22-0.36	0.20-0.31
Map	0	1.00	0.80-1.01	0.06-0.13	0.07-0.18
	5	1.00	0.81-0.91	0.38-0.67	0.31-0.54
	10	1.00	0.74-0.84	0.53-0.77	0.42-0.58
	20	1.00	0.76-0.78	0.690.89	0.51-0.67
Web	0	1.00	0.85-1.06	0.40-0.75	0.32-0.54
	5	1.00	0.74-0.78	0.880.97	0.66-0.71
	10	1.00	0.75-0.78	0.93-0.98	0.70-0.74
	20	1.00	0.74-0.77	0.96-0.99	0.72-0.73

This table summarizes the impact of data fidelity on application energy consumption. Each entry shows the minimum and maximum measured energy consumption for four data objects. The entries are normalized to baseline measurements of full fidelity objects with no power management. This data was extracted from Figures 6, 8, 10 and 13.

Figure 16. Summary of energy impact of fidelity

### Response to Arguments

- 5. Applicant's arguments with respect to the amended claims have been considered but are moot in view of the new ground(s) of rejection. However, applicant's arguments filed 05/22/2006 have been fully considered but they are not persuasive.
  - A. Applicant argues that the prior art does not show the 'determining when a particular quantum of power has been used on the machine and responding to that measurement by sampling state data of the machine' (page 7-8 of the Remarks). Jason Flinn and M. Satyanarayanan clearly disclose 'determining when a particular quantum of power has been used on the machine and responding to that measurement by sampling state data of the machine' in page 2,lines 6-23, fig. 3, fig. 4, fig. 5, where a particular quantum of power has been used on the machine and responding to that measurement by sampling state data of the machine and responding to that measurement by sampling state data of the machine in page 2, Lines 21-31 where a code is implementing in the system integration as API for the subsystem.

Art Unit: 2863

B. Applicant continue to argue that the prior art does not show the 'determining each time a quatum of power has been used on a machine, or sampling state data of the machine in response to usage of the quantum of power (page 9 of the Remarks). Jason Flinn and M. Satyanarayanan clearly disclose 'determining each time a quatum of power has been used on a machine in fig. 4 page 12, section 5.1.4, or sampling state data of the machine in response to usage of the quantum of power in fig. 8, 6.

Page 17

- C. Applicant continue to argue that the prior art does not show the 'profile power usage of code executing on the machine' (page 10-11 of the Remarks). Jason Flinn and M. Satyanarayanan clearly disclose 'profile power usage of code executing on the machine' in fig. 1, energy monitor, fig. 2, Odyssey, page 2, Lines 6-22 and 21-31, where a specific code in the system as to measure the power usage of the subsystem shown as display (fig. 4), LAN (fig. 4), disk (fig. 4), speech (fig. 7) function.
- 6. Any inquiry concerning this communication or earlier communications from the examiner should be directed to Tung S Lau whose telephone number is 571-272-2274. The examiner can normally be reached on M-F 9-5:30. If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, John Barlow can be reached on 571-272-2269. The fax phone numbers for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

TL

Tung S. Lau

AU 2863, Patent examiner

June 5, 2006